
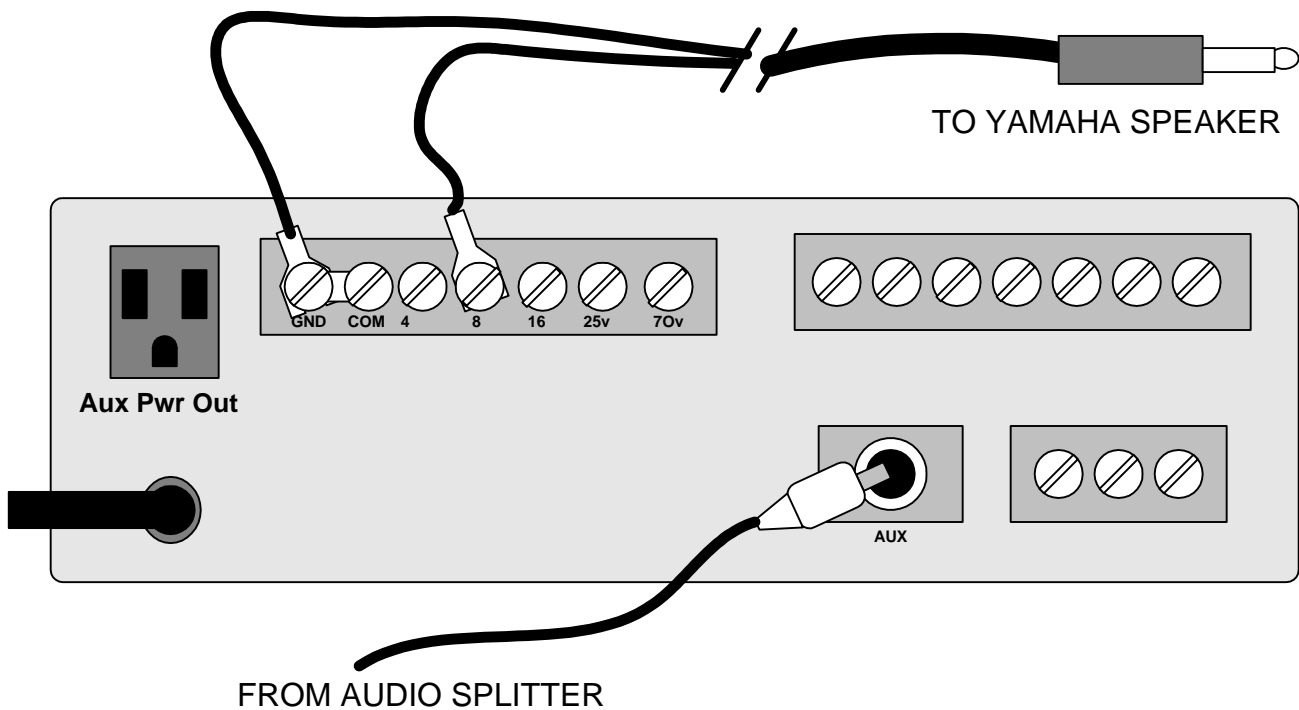


BOGEN AMPLIFIER SWITCHES, SETTINGS, AND CABLE CONNECTIONS

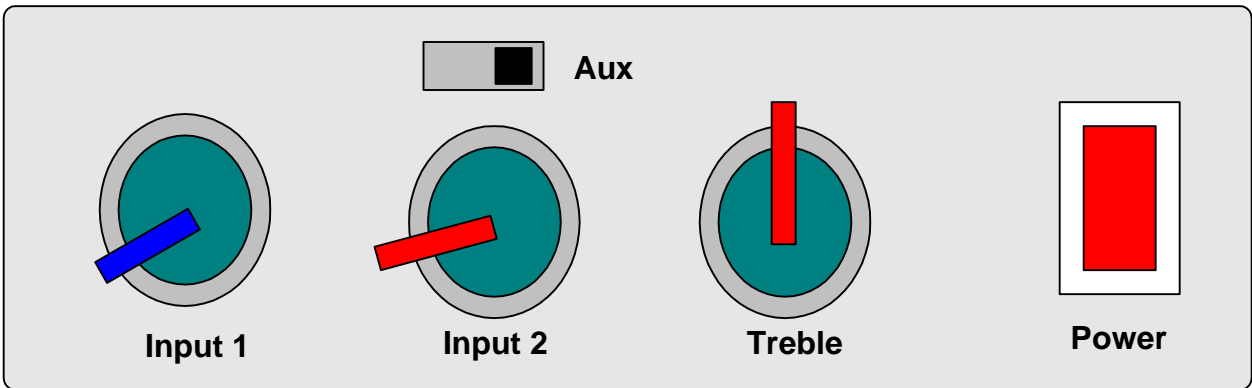

Notes: Aux Pwr Out is used to feed the tape deck it's power.
Setting for the Aux Volume may change after the addition of "T" Pad attenuator (6db)
There are other cables attached to the mike channels but are unused in this scenario.
Aux Input on Rear above (bottom Right side of rear) is the main input to the Bogen Amplifier